

# MEISHUO Building Materials CO., ltd

Office: No.2208, Huaqiao Square, Pukou district, Nanjing, China

Tel: 0086-025-58196288 Fax:0086-025-58196399 Website: <a href="www.msbxf.com">www.msbxf.com</a> E-mail:sariel@msbxf.com

## MSDSZJ EXPANSION JOINT SPEC DATA

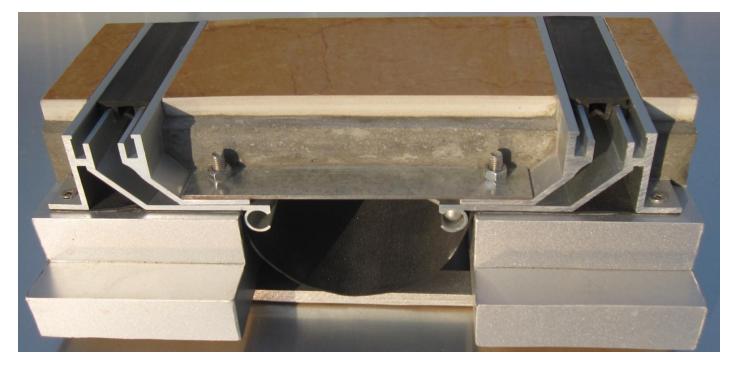

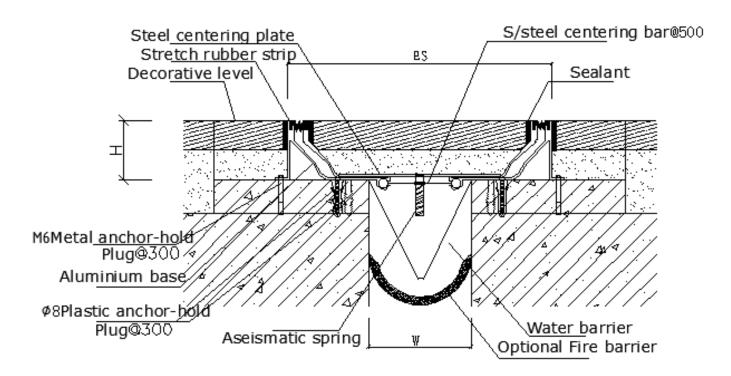

## **MEISHUO Building Materials CO., ltd**

Office: No.2208, Huaqiao Square, Pukou district, Nanjing, China

Tel: 0086-025-58196288 Fax:0086-025-58196399 Website: <u>www.msbxf.com</u> E-mail:sariel@msbxf.com

### MSDSZJ EXPANSION JOINT SPEC DATA

#### **Product Description:**

An architectural line of thermal, seismic, waterproof and fire rated expansion joint systems meeting the aesthetic and structural demands of airports, hospitals, shopping malls and other building types.

#### **TECHNICAL DATA:**

	Flush Seismic Floor Covers MSDSZJ															
	Suitable for Joint width: 75—500mm															
Joint Width(W)		50	75	100	125	150	175	200	250	300	350	400	450	500	Remark	
Exposed surface(ES)		190	215	230	255	280	305	330	380	430	480	530	580	630	The movement capacity always means the movement of the rubber.	
Moveme nt Capacity		Total	50	50	50	50	50	50	50	50	50	50	50	50	50	In fact, the movement joint of the centering bar is much more bigger than rubber's. Usually the center plate is steel plate
	ne +	+	25	25	25	25	25	25	25	25	25	25	25	25	25	
	ty -	-	25	25	25	25	25	25	25	25	25	25	25	25	25	
Wideness of Plate(mm)		90	115	140	165	190	215	240	290	340	390	440	490	540	or galvanized steel plate. Stainless steel plate is not economic because this	
Thickness of Plate (mm)		1.5	1.5	1.5	1.5	2	2	2	3	3	3	5	5	5	plate is buried underground. Aluminum plate is not stronger than steel plate. It must be very thick and not	
															cost-effective.	

**MATERIALS:** 

Aluminum Base: ASTM 6063T5 Mill finish, anodisation

#### **WARRANTY:**

Meishuo warrants that its products are manufactured free of defects and conform to the technical data listed. Under this warranty, we will replace any material proven defective when applied in accordance with our written instructions for applications recommended by us as suitable for subject products. Meishuo shall not be liable for any injury, loss or damage, direct or consequential, arising out of the use of the product.